


**The unique
Rotary Lobe Pump
with MIP!**



Problematic Waste Disposal with Rotary Lobe Pumps from Boerger!

Waste Processes in the recycling industry demand reliable and robust pump units. The wide range of pump sizes, the option loaded modular design and the peripheral equipment enable Boerger to supply a suitable Rotary Lobe Pump for your pump application.

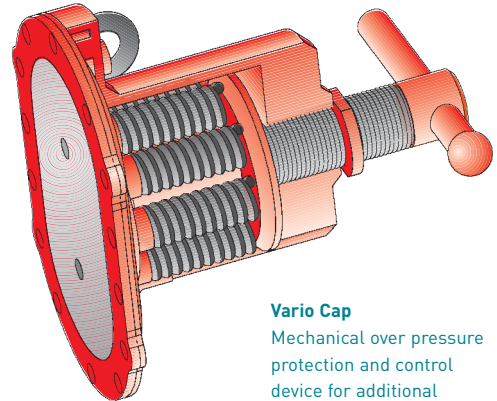


Vario Cap
Mechanical over pressure protection and control device for additional operational safety.


The Boerger MIP-Design is a unique advantage to minimize downtime and maintenance: MIP (Maintenance In Place) allows the quick and convenient replacement of all fluid wetted parts without removal of pipes, drives or other components of the pump unit by your own staff. Quick - Uncomplicated - Inexpensive. The quick release cover allows simple access to the inner parts of the pump.

The various, often strongly contaminated liquids in the recycling industry require individually customized selections of pumps: Boerger offers various shaft seals designs and rotor materials with different coatings (Elastomer, PTFE or Urethane) or solid stainless steel rotors. Casing protection plates are supplied with various steel, plastic or ceramic qualities. For additional operation safety the Vario-Cap for over pressure protection can be added.

Rotary Lobe Pumps are self-priming, valveless positive displacement pumps. The screw rotor enables pulsation free and gentle conveyance, the pump operation is reversible.

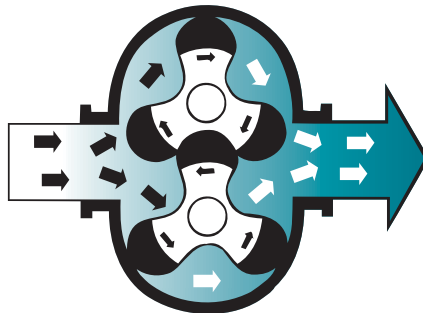

The Multicrusher is an effective, widely applicable macerating unit based on the proven design of the Boerger Rotary Lobe Pump: Boerger - one principle, two bestsellers

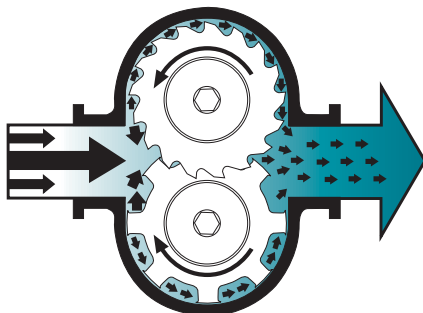

Worldwide unique and exclusive from Boerger: Unrivalled MIP-Design reduces life cycle cost and downtime.





Photo Chemicals | In a production facility a Boerger Rotary Lobe Pump is used for feeding low viscosity photo chemicals into a recycling process. The pump is fitted with casing and flange connections from high grade stainless steel and operates to the full satisfaction of the customer for ten years.

TECHNICAL SPECIFICATION

Pump Model PL 200	PL 200
Flow Rate	20-50 m ³ /h 88-220 usgpm
Pressure	2 bar 29 psi
Power	5,5 kW 7.5 HP



Pulp from Paper Waste | For paper waste recycling a Boerger Rotary Lobe Pump conveys pulp in a paper mill. All fluid-wetted parts of the Rotary Lobe Pump are made from stainless steel, the rotor tips are coated with EPDM.

TECHNICAL SPECIFICATION

Pump Model FL 1036	FL 1036
Flow Rate	100-165 m ³ /h 440-726 usgpm
Pressure	1 bar 15 psi
Power	22 kW 30 HP



Liquid Chemical Waste | A company for environmental protection and municipal services operates two Boerger Rotary Lobe Pumps, which are installed above each other in a space saving design. Since various chemicals have to be pumped, the unit is made from stainless steel and the rotors and secondary seals are made from highly resistant PTFE.

TECHNICAL SPECIFICATION

Pump Model PL 300	PL 300
Flow Rate	60 m ³ /h 264 usgpm
Pressure	1 bar 15 psi
Power	4 kW 5 HP



Contaminated Fatty Acids | In this application well flowable, contaminated animal and vegetable fats are conveyed by a Boerger Rotary Lobe Pump. A relief valve with bypass system is installed to prevent over pressure from accidentally closed valves.

TECHNICAL SPECIFICATION

Pump Model AL 50	AL 50
Flow Rate	4-6 m ³ /h 18-26 usgpm
Pressure	4 bar 58 psi
Power	1,5 kW 2 HP



Oil Sludge | In this plant a Boerger Rotary Lobe Pump is used to transfer oil sludge from the receiving station to a recycling process. With the good suction capabilities even highly viscous fluids can be primed through the macerating device installed in the suction line. The discontinuously operated pump is installed so that liquids remain in the pump body for easy re-priming.

TECHNICAL SPECIFICATION

Pump Model PL 200	PL 200
Flow Rate	28 m ³ /h 123 usgpm
Pressure	4 bar 58 psi
Power	7,5 kW 10 HP



Kieselguhr | This pump with MIP Radial Liners is installed in a brewery for loading and unloading of tank trucks with Kieselguhr. The flange connections have different nominal diameters at suction and discharge side, adapted to the requirements of the customer.

TECHNICAL SPECIFICATION

Pump Model CL 390*	CL 390*
Flow Rate	max. 12 m ³ /h 53 usgpm
Pressure	4-6 bar 58-87 psi
Power	3 kW 4 HP

* with screw auger feed



Thickened Mud | In a shipyard in Asia thickened mud from sandblast cleaning of a ship is pumped with a Boerger Rotary Lobe Pump from a storage tank to the dewatering unit. In spite of the abrasiveness of the fluid the pump operates 16 hours per day with a discharge pressure of 4 bar (58 psi) to the full satisfaction of the customer.

TECHNICAL SPECIFICATION

Pump Model PL 100	PL 100
Flow Rate	12 m ³ /h 53 usgpm
Pressure	4 bar 58 psi
Power	4 kW 5 HP

BÖRGER®

Börger GmbH

Benningsweg 24

46325 Borken-Weseke

Germany

Phone +49 (0) 28 62 / 91 03-0

Fax +49 (0) 28 62 / 91 03-46

info@boerger-pumps.com

www.boerger-pumps.com

